

Laser Module LC-LMD-650-02-T60

Ø 6.2 mm, 650 nm Laser Module, high operating temperature

Features

1. APC (auto power control) IC inside
2. Low current consumption of the APC circuit
3. Surge current protection
4. High quality lens for output beam
5. Operating temperature up to 60°C



Part No. Indication

LC-LMD – **650** – **02** – **01** – **A** – **T60**


Absolute Maximum Ratings

Item	Symbol	Rating	Unit
Power supply voltage	V_{CC}	3.0	V
Laser Module optical output power	P_o	< 1	mW
Operation temperature	T_{opr}	-10 ~ 60	°C
Storage temperature	T_{stg}	-10 ~ 60	°C

Electrical and Optical Characteristics ($T_C = 25^\circ\text{C}$)

Item	Symbol	Min.	Typ.	Max	Unit	Condition
Wavelength	λ	650	655	660	nm	$P_o = < 1 \text{ mW}$
Output power	$P_{out} 01$	0.5	-	0.9	mW	$V_{cc} = 3 \text{ V}$
Operation current	I_{op}	-	20	30	mA	$P_o = 0.6 \text{ mW}$ $V_{cc} = 3 \text{ V}$
Operation voltage	V_{op}	2.5	-	3.3	Volt	
Laser Beam spot size at 10 m		< 20 mm				
Divergence angle		2 mrad				
Mean time to failure (MTTF) 1 mW 25 °C		>10000 hrs				

Outline Dimensions (Units: mm)

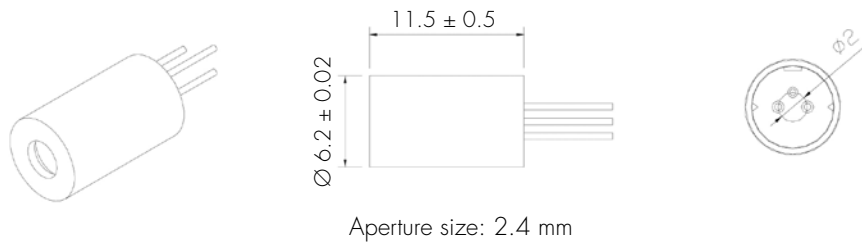

Pin Assignment

Pin 1: V_{cc}
Pin 2: GND
Pin 3: NC



A type: Heat sink stand (-)